



HIAB 700 E-5 HiPro + Jib165X-4

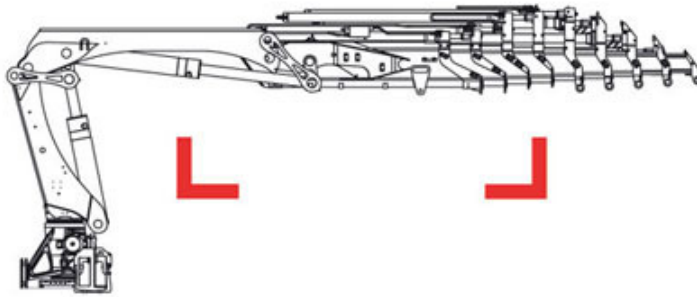

Technical Data

Load diagram

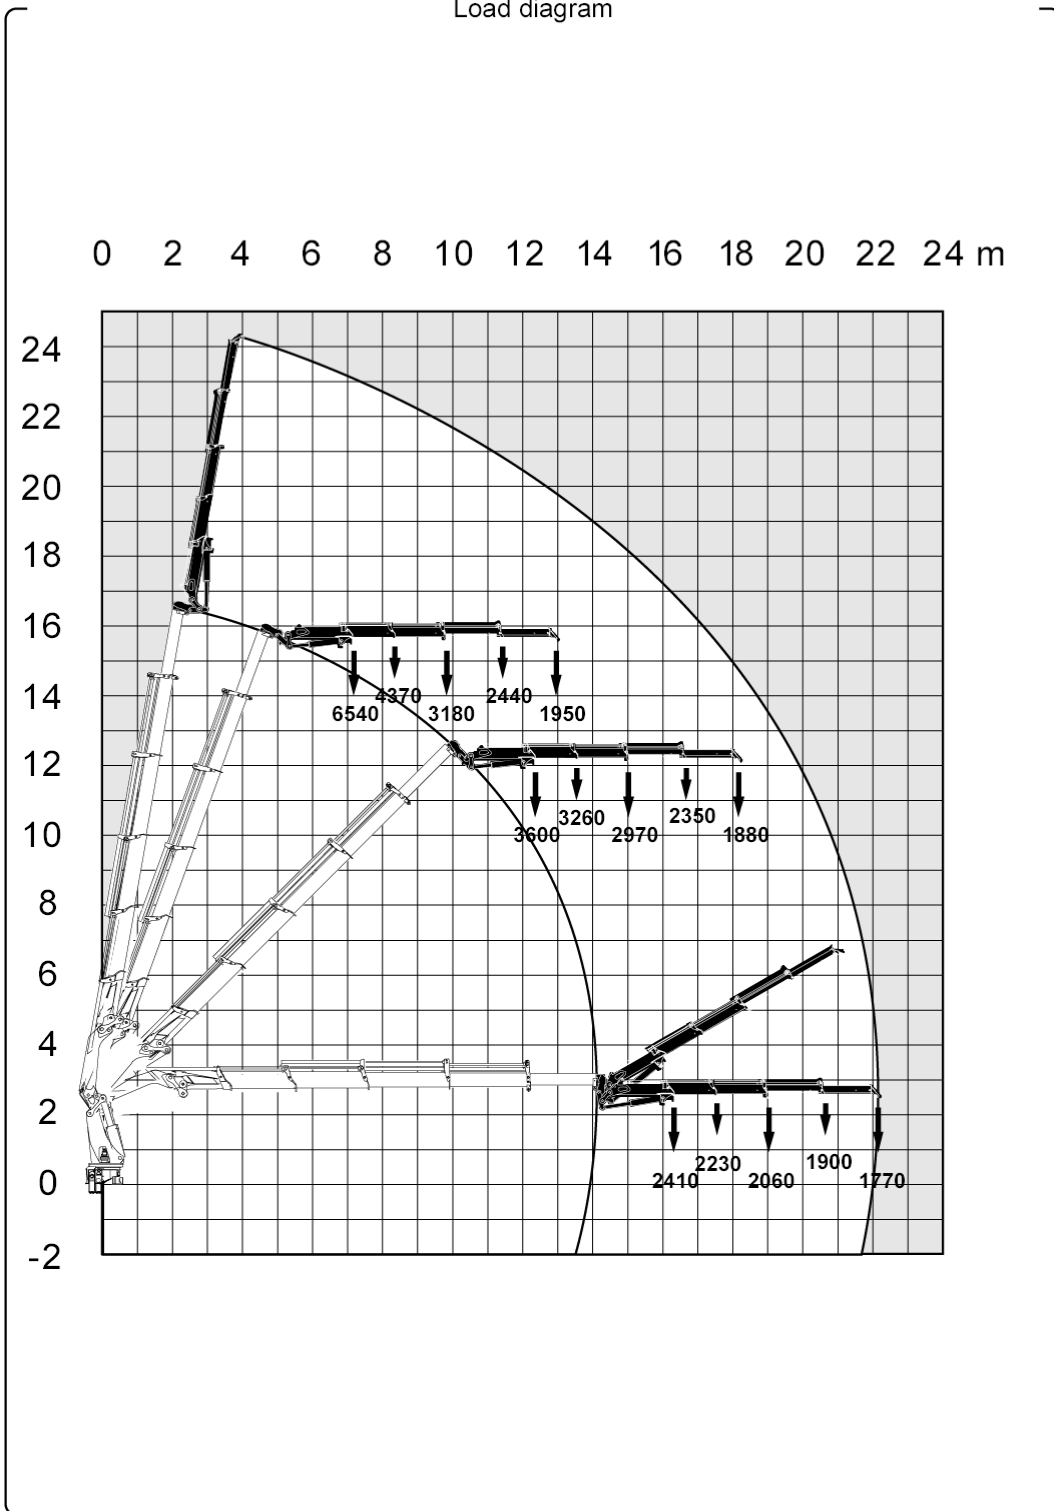

The HIAB XS range



Version

HIAB 700 E-5 HiPro + Jib165X-4

Lifting capacity	kNm	0
Lifting capacity	tm	0.0
Lifting capacity (ADC)	kNm	0
Lifting capacity (ADC)	tm	0.0
Outreach - lifting capacity, standard	m-kg	16.6 - 2,410 17.8 - 2,230 19.0 - 2,060 20.5 - 1,900 22.0 - 1,770
Outreach - lifting capacity, manual extensions	m-kg	
Hydraulic outreach, standard	m	22.1
Hydraulic boom extension	m	0.0
Outreach, manual extensions	m	0.0
Lifting height above installation level, hydr/man	m	0.0 / 0.0
Rec. oil flow	l/min	90 - 140
Power needed at rec. oil flow V80	kW	-
Power needed at rec. oil flow V91	kW	48- 75
Working pressure	Mpa	32.0
Oil in tank	l	0 - 250
Tank capacity	l	0 - 285
Slewing angle	°	continuous
Max slope viable at full capacity	°	5
Slewing torque, gross	kNm	69.0
Slewing speed 80	°/s	0
Slewing speed	°/s	10
Lifting speed at standard hydraulic outreach	m/s	0.0
Height in folded position	mm	2,793
Width in folded position	mm	2,500
Install space required. Rotation area not included	mm	1,698
Install space required with hose and pipe kit	mm	0
Weight		
Crane in standard version without support legs	kg	7,430
Top seat	kg	0
Frame attachments	kg	115 - 0
Support leg equipment	kg	1,180 - 1,305

Data sheet

HIAB 700 E-5 HiPro + Jib165X-4